

LANCOM LN-830acn dual Wireless

Dual radio enterprise-class 11ac WLAN access point in elegant design with up to 867 Mbps



The LANCOM LN-830acn dual Wireless is a powerful 11ac WLAN enterprise-class access point. It provides fast WLAN to 11n clients in the 2.4-GHz frequency band and also to the increasing number of modern 11ac-enabled devices in the 5-GHz band. Thanks to its puristic and elegant design it is ideal for an inconspicuous application in modern environments.

- Dual concurrent WLAN – parallel operation at 2.4 and 5 GHz with up to 867 Mbps with IEEE 802.11ac
- Dynamic WLAN optimization thanks to LANCOM Active Radio Control (ARC)
- Powerful WLAN diagnostics with Spectral Scan
- Professional security features such as IEEE 802.1X
- Operation via LANCOM Management Cloud, WLAN controller or stand-alone
- Easy and secure integration of external users with the Public Spot Option
- Elegant LANCOM design with integrated antennas and hidden cable connectors

LCOS 10.50

LANCOM LN-830acn dual Wireless

Dual concurrent Wi-Fi with up to 867 Mbps

The LANCOM LN-830acn dual Wireless offers one wireless radio module for 11ac WLAN and another for 11n WLAN. This provides fast WLAN to 11n clients in the 2.4-GHz frequency band and also the increasing number of modern 11ac-enabled devices in the 5-GHz band.

Active Radio Control for dynamic radio-field optimization

The LANCOM LN-830acn dual Wireless supports the WLAN optimization feature LANCOM Active Radio Control. This intelligent combination of innovative features included with the LCOS operating system – such as Band Steering, Adaptive Noise Immunity, RF Optimization, and Client Steering – sustainably increases WLAN performance and supports administrators with professional tools for WLAN management.

Powerful WLAN diagnostics with Spectral Scan

The LANCOM LN-830acn dual Wireless uses the Spectral Scan to search the surrounding radio field for sources of interference. This professional tool for efficient WLAN troubleshooting is a combination of hardware and software features. It identifies and graphically represents sources of interference, so helping the administrator to initiate countermeasures.

LANCOM security for wireless networks

With numerous integrated security features, such as IEEE 802.1X, this enterprise-class access point provides optimal security for networks. As a result, employees and visitors all benefit from security policies in the network.

Zero-touch deployment

The LANCOM LN-830acn dual Wireless can be versatily operated: Managed via the LANCOM Management Cloud it is integrated into a comprehensive, automated network orchestration, based on Software-defined Networking technology. It can also be operated via a LANCOM WLAN controller or be applied in stand-alone operation.

Secure integration of external users

In combination with the LANCOM Public Spot Option, the LANCOM LN-830acn dual Wireless is ideal for operating hotspots. Users benefits from a hotspot that is secure and easy-to-use, while hotspot operators can be sure that their own network remains separate from the hotspot.

Elegant LANCOM design

The white LANCOM LN-830acn dual Wireless with integrated antennas stands out with its puristic elegance. Thanks to the modern design it is ideal for an inconspicuous application in environments of every industry sector and seamlessly fits into every environment.

LANCOM LN-830acn dual Wireless

Maximum future viability

The LANCOM LN-830acn dual Wireless supports what is currently the fastest WLAN standard, so that customers are well prepared for future challenges. What's more, LANCOM products are designed for a service life of several years and are equipped with hardware dimensioned for the future. Even reaching back to older product generations, updates to the LANCOM Operating System – LCOS – are available several times a year, free of charge and offering major features.

LCOS 10.50

LANCOM LN-830acn dual Wireless

WLAN product specifications

| | |
|--|---|
| Frequency band 2.4 GHz and 5 GHz | 2400-2483.5 MHz (ISM), 5150-5350 MHz and 5470-5725 MHz (depending on country-specific restrictions) |
| Integrated Antenna Gain (per antenna (2)) | up to 3 dBi in 2.4 GHz, up to 4.5 dBi in 5 GHz |
| Data rates IEEE 802.11ac/n | 867 Mbps according to IEEE 802.11ac with MCS9 (fallback to 6,5 Mbps with MCS0). Compatible to IEEE 802.11ac/n/a, IEEE 802.11 ac/n, IEEE 802.11n/a compatibility mode or pure IEEE 802.11ac, pure IEEE 802.11n, pure IEEE 802.11a mode and data rates selectable |
| Data rates IEEE 802.11n | 300 Mbps according to IEEE 802.11n with MCS15 (fallback to 6,5 Mbps with MCS0). Compatible to IEEE 802.11a/n, IEEE 802.11g/n, IEEE 802.11b/g/n or IEEE 802.11b/g compatibility mode or pure IEEE 802.11n, pure IEEE 802.11a, IEEE 802.11g or pure IEEE 802.11b mode and data rates selectable |
| Data rates IEEE 802.11a/h | 54 Mbps (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power output) and DFS (automatic channel selection, radar detection) and data rates selectable |
| Data rates IEEE 802.11b/g | 54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection) compatible to IEEE 802.11b (11, 5.5, 2, 1 Mbps, Automatic Rate Selection), IEEE 802.11b/g compatibility mode or pure IEEE 802.11g or pure IEEE 802.11b and data rates selectable |
| Range IEEE 802.11ac/n/a/g/b * | Up to 150 m (up to 30 m in buildings) |
| Output power at radio module WLAN-1, 5 GHz | Maximum transmit power may be limited below these numbers to ensure compliance with local regulatory requirements. IEEE 802.11a/h: +17 up to +18 dBm @ 6 up to 48 Mbps, +13 up to +15 dBm @ 54 Mbps, IEEE 802.11n: +17 up to +18 dBm @ (MCS0/8/16, 20 MHz), +11 up to +13 dBm @ (MCS7/15/23, 20 MHz), +16 up to +17 dBm @ (MCS0/8/16, 40 MHz), +9 up to +12 dBm @ (MCS7/15/23, 40 MHz) |
| Output power at radio module WLAN-2, 5 GHz | Maximum transmit power may be limited below these numbers to ensure compliance with local regulatory requirements. IEEE 802.11a/h: +18 dBm @ 6 up to 48 MBit/s and +16 dBm @ 54 MBit/s IEEE 802.11ac: +16 up to +18 dBm @ (MCS0-7, 20/40/80 MHz), +14 dBm @ (MCS8, 20/40/80 MHz), +14 dBm @ (MCS9, 40/80 MHz) |
| Output power at radio module WLAN-1, 2.4 GHz | Maximum transmit power may be limited below these numbers to ensure compliance with local regulatory requirements. IEEE 802.11b: +22 dBm @ 1 and 2 Mbps, +22 dBm @ 5,5 and 11 Mbps, IEEE 802.11g: +22 dBm @ 6 up to 36 Mbps, +20 dBm @ 48 Mbps, +18 dBm @ 54 Mbps, IEEE 802.11n: +22 dBm @ (MCS0/8/16, 20 MHz), +16 dBm @ (MCS7/15/23, 20 MHz), +21 dBm @ (MCS0/8/16, 40 MHz), +15 dBm @ (MCS7/15/23, 40 MHz) |
| Minimum transmission power | Transmission power reduction in software in 1 dB steps to min. 0.5 dBm |
| Receiver sensitivity WLAN-1, 5 GHz | IEEE 802.11a/h: -98 dBm @ 6 Mbps, -81 dBm @ 54 Mbps, IEEE 802.11n: -94 dBm @ (MCS0, 20 MHz), -76dBm @ (MCS 7, 20 MHz), -92 dBm @ (MCS0, 40 MHz), -72 dBm @ (MCS7, 40 MHz) |
| Receiver sensitivity WLAN-2, 5 GHz | IEEE 802.11a/h: -95 dBm @ 6 MBit/s, -76 dBm @ 54MBit/s, IEEE 802.11ac: -94 dBm @ MCS0 20 MHz, -76 dBm @ MCS7 20 MHz, -72 dBm @ MCS8 20 MHz, -92 dBm @ MCS0 40 MHz, -76 dBm @ MCS7 40 MHz, -71 dBm @ MCS8 40 MHz, -70 dBm @ MCS9 40 MHz, -90 dBm @ MCS0 80 MHz, -72 dBm @ MCS7 80 MHz, -68 dBm @ MCS8 80 MHz, -67 dBm @ MCS9 80 MHz |
| Receiver sensitivity WLAN-1, 2.4 GHz | IEEE 802.11b: -97 dBm @ 1 MBit/s, -93 dBm @ 11 MBit/s, IEEE 802.11g: -95dBm @ 6 MBit/s, -81dBm @ 54 MBit/s IEEE 802.11n: -94 dBm @ 6,5MBit/s (MCS0, 20 MHz), -77 dBm @ 65 MBit/s (MCS7, 20 MHz), -91 dBm @ 15 MBit/s (MCS0, 40 MHz), -74 dBm @ 150 MBit/s (MCS7, 40 MHz) |

LCOS 10.50

LANCOM LN-830acn dual Wireless

WLAN product specifications

| | |
|-------------------------|--|
| Radio channels 5 GHz | Up to 26 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel selection depending on national regulations) |
| Radio channels 2.4 GHz | Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions) |
| Multi-SSID | Up to 31 (Simultaneous use of up to 16 independent WLAN networks at WLAN interface 1 and up to 15 independent WLAN networks at WLAN interface 2; time-controlled activation and deactivation of WLAN networks) |
| Concurrent WLAN clients | Up to 256 clients (recommended) ** |
| Others | Wireless Quality Indicators (WQI), Hotspot 2.0 |
| *) Note | The effective distances and transmission rates that can be achieved are depending of the onsite RF conditions |
| ***) Note | The 11ac WLAN module supports max. 128 clients, this specification refers to the combination with the 11n radio module. |

Supported WLAN standards

| | |
|----------------|---|
| IEEE standards | IEEE 802.11ac (Wi-Fi 5), IEEE 802.11n (Wi-Fi 4), IEEE 802.11a, IEEE 802.11g, IEEE 802.11b, IEEE 802.11i, IEEE 802.1X, IEEE 802.11u, IEEE 802.11r (Fast Roaming), IEEE 802.11w (Protected Management Frames), WME and U-APSD/WMM Power Save as defined in IEEE 802.11e, IEEE 802.11h, IEEE 802.11d |
|----------------|---|

Standard IEEE 802.11ac (Wi-Fi 5)

| | |
|--------------------|------------------------------------|
| Supported features | 2x2 MIMO, 80 MHz channels, QAM-256 |
|--------------------|------------------------------------|

Standard IEEE 802.11n (Wi-Fi 4)

| | |
|--------------------|---|
| Supported features | 2x2 MIMO, 40 MHz channel, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgement, STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval |
|--------------------|---|

WLAN operating modes

| | |
|-------|--|
| Modes | WLAN access point (standalone, WLC or LANCOM Management Cloud managed), WLAN bridge (P2P or P2MP) (standalone or AutoWDS*), (standalone, WLC or LANCOM Management Cloud managed), WLAN client mode, transparent WLAN client mode |
|-------|--|

Security

| | |
|---------------------------|--|
| Encryption options | WPA3-Personal, IEEE 802.1X (WPA3-Enterprise, WPA2-Enterprise), IEEE 802.11i (WPA2-Personal), Wi-Fi Certified™ WPA2™, WPA, WEP, IEEE 802.11w (Protected Management Frames), LEPS-MAC (LANCOM Enhanced Passphrase Security MAC), LEPS-U (LANCOM Enhanced Passphrase Security User) |
| Encryption | AES-CCMP AES-GCMP, TKIP, RC4 (only used by WEP) |
| EAP types (authenticator) | EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-FAST |

LCOS 10.50

LANCOM LN-830acn dual Wireless

Security

| | |
|-------------------|---|
| RADIUS/EAP-server | User administration MAC-based, rate limiting, passphrases, VLAN user based, authentication of IEEE 802.1X clients via EAP-TLS, EAP-TTLS, EAP-MD5, EAP-GTC, PEAP, MSCHAP, MSCHAPv2, Dynamic Peer Discovery |
| Others | WLAN protocol filters, IP-redirection of any packet received over the WLAN interface, IEEE 802.1X supplicant, background scanning, client detection ("rogue WLAN client detection"), Wireless Intrusion Detection System (WIDS), RADIUS CoA (Change of Authorization) |

LANCOM Active Radio Control

| | |
|-----------------------------|---|
| Client Management | Steering of WLAN clients to the ideal access point using 802.11k and 802.11v |
| Band Steering | Steering of 5GHz clients to the corresponding high-performance frequency band |
| Managed RF Optimization* | Selection of optimal WLAN channels by the administrator |
| Adaptive Noise Immunity | Better WLAN throughput due to immunity against interferences |
| Spectral Scan | Monitoring your WLAN for sources of interference |
| Adaptive RF Optimization | Dynamic selection of the optimal WLAN channel |
| Airtime Fairness | Improved utilization of the WLAN bandwidth |
| Adaptive Transmission Power | Automatic adjustment of the transmission power for Wi - Fi backup scenarios |
| *) Note | Only in installations with WLAN controller |

Roaming

| | |
|---------|---|
| Roaming | IAPP (Inter Access Point Protocol), IEEE 802.11r (Fast Roaming), OKC (Opportunistic Key Caching), Fast Client Roaming (only in operating mode client modus) |
|---------|---|

Layer 2 features

| | |
|--------------------|---|
| VLAN | 4.096 IDs based on IEEE 802.1q, dynamic assignment |
| Quality of Service | WME based on IEEE 802.11e, Wi-Fi Certified™ WMM® |
| Rate limiting | SSID based, WLAN client based |
| Multicast | IGMP-Snooping, MLD-Snooping, Multicast-to-Unicast-conversion on WLAN interfaces |
| Protocols | Ethernet over GRE-Tunnel (EoGRE), L2TPv3, ARP-Lookup, LLDP, DHCP option 82, IPv6-Router-Advertisement-Snooping, DHCPv6-Snooping, LDRA (Lightweight DHCPv6 Relay Agent), Spanning Tree, Rapid Spanning Tree, ARP, Proxy ARP, BOOTP, DHCP, LACP |

Layer 3 features

| | |
|----------|--|
| Firewall | Stateful inspection firewall including paket filtering, extended port forwarding, N:N IP address mapping, paket tagging, support for DNS targets, user-defined rules and notifications |
|----------|--|

LANCOM LN-830acn dual Wireless

Layer 3 features

| | |
|---------------------------------|---|
| Quality of Service | Traffic shaping, bandwidth reservation, DiffServ/TOS, packetsize control, layer-2-in-layer-3 tagging |
| Security | Intrusion Prevention, IP spoofing, access control lists, Denial of Service protection, detailed settings for handling reassembly, session-recovery, PING, stealth mode and AUTH port, URL blocker, password protection, programmable reset button |
| PPP authentication mechanisms | PAP, CHAP, MS-CHAP, and MS-CHAPv2 |
| High availability / redundancy | VRRP (Virtual Router Redundancy Protocol), analog/GSM modem backup |
| Router | IPv4-, IPv6-, NetBIOS/IP multiprotokoll router, IPv4/IPv6 dual stack |
| Router virtualization | ARF (Advanced Routing and Forwarding) up to separate processing of 16 contexts |
| IPv4 services | HTTP and HTTPS server for configuration by web interface, DNS client, DNS server, DNS relay, DNS proxy, dynamic DNS client, DHCP client, DHCP relay and DHCP server including autodetection, NetBIOS/IP proxy, NTP client, SNTP server, policy-based routing, Bonjour-Proxy, RADIUS |
| IPv6 services | HTTP and HTTPS server for configuration by web interface, DHCPv6 client, DHCPv6 server, DHCPv6 relay, DNS client, DNS server, dynamic DNS client, NTP client, SNTP server, Bonjour-Proxy, RADIUS |
| Dynamic routing protocols | RIPv2 |
| IPv4 protocols | DNS, HTTP, HTTPS, ICMP, NTP/SNTP, NetBIOS, PPPoE (server), RADIUS, RADSEC (secure RADIUS), RTP, SNMPv1,v2c,v3, TFTP, TACACS+, IGMPv3 |
| IPv6 protocols | NDP, stateless address autoconfiguration (SLAAC), stateful address autoconfiguration (DHCPv6), router advertisements, ICMPv6, DHCPv6, DNS, HTTP, HTTPS, PPPoE, RADIUS, SMTP, NTP, Syslog, SNMPv1,v2c,v3, MLDv2, NPTv6 (NAT66) |
| WAN operating mode | VDSL, ADSL1, ADSL2 or ADSL2+ additional with external DSL modem at an ETH port |
| WAN protocols | PPPoE, Multi-PPPoE, ML-PPP, GRE, EoGRE, PPTP (PAC or PNS), L2TPv2 (LAC or LNS), L2TPv3 with Ethernet-Pseudowire, IPoE (using DHCP or no DHCP), RIP-1, RIP-2, VLAN, IPv6 over PPP (IPv6 and IPv4/IPv6 dual stack session), IP(v6)oE (autokonfiguration, DHCPv6 or static) |
| Tunneling protocols (IPv4/IPv6) | 6to4, 6in4, 6rd (static and over DHCP), Dual Stack Lite (IPv4-in-IPv6-Tunnel), 464XLAT |

Interfaces

| | |
|------------------------------------|---|
| Ethernet ports | 2 x 10/100/1000BASE-T autosensing (RJ-45), IEEE 802.3az, PoE (Power over Ethernet) at ETH1 |
| Serial interface | Serial configuration interface / COM port (8 pin Mini-DIN): 9,600 - 115,000 baud, suitable for optional connection of analog/GPRS modems. Supports internal COM port server and allows for transparent asynchronous transmission of serial data via TCP |
| Internal antennas per radio module | Radio module 1 and 2 use two internal antennas |

LCOS 10.50

LANCOM LN-830acn dual Wireless

Hardware

| | |
|-------------------------|---|
| Environment | Temperature range 0° to +40°C; humidity up to 95%; non-condensing |
| Power consumption (max) | Approx. 11 watt with power supply adapter (total power consumption of access point and power supply adapter), approx. 12 watt via PoE |
| Housing | Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; 205 x 42 x 205 mm (W x H x D) |

Management and monitoring

| | |
|---------------------------|---|
| Management | LANCOM Management Cloud, LANconfig, WEBconfig, WLAN controller, LANCOM Layer 2 management (emergency management) |
| Management functions | Alternative boot configuration, voluntary automatic updates for LCMS and LCOS, individual access and function rights up to 16 administrators, RADIUS and RADSEC user management, remote access (WAN or (W)LAN, access rights (read/write) adjustable separately), SSL, SSH, HTTPS, Telnet, TFTP, SNMP, HTTP, access rights via TACACS+, scripting, timed control of all parameters and actions through cron job |
| FirmSafe | Two stored firmware versions, incl. test mode for firmware updates |
| automatic firmware update | configurable automatic checking and installation of firmware updates |
| Monitoring | LANCOM Management Cloud, LANmonitor, WLANmonitor |
| Monitoring functions | Device SYSLOG, SNMPv1,v2c,v3 incl. SNMP-TRAPS, extensive LOG and TRACE options, PING and TRACEROUTE for checking connections, internal logging buffer for firewall events |
| Monitoring statistics | Extensive Ethernet, IP and DNS statistics; SYSLOG error counter, accounting information exportable via LANmonitor and SYSLOG, Layer 7 Application Detection including application-centric tracking of traffic volume |
| IPerf | IPerf is a tool for measurements of the bandwidth on IP networks (integrated client and server) |
| SLA-Monitor (ICMP) | Performance monitoring of connections |
| SD-WLAN | SD-WLAN – automatic WLAN configuration via the LANCOM Management Cloud |
| SD-LAN | SD-LAN – automatic LAN configuration via the LANCOM Management Cloud |

Declarations of conformity*

| | |
|------------------------------|---|
| CE | EN 60950-1, EN 301 489-1, EN 301 489-17 |
| Wi-Fi Alliance Certification | Wi-Fi Certified |
| 5 GHz WLAN | EN 301 893 |
| 2.4 GHz WLAN | EN 300 328 |
| Medical | Medical conformity with EN 60601-1-2 |

LCOS 10.50

LANCOM LN-830acn dual Wireless

Declarations of conformity*

| | |
|-------------------|---|
| IPv6 | IPv6 Ready Gold |
| Country of Origin | Made in Germany |
| *) Note | You will find all declarations of conformity in the products section of our website at www.lancom-systems.com |

Scope of delivery

| | |
|-------------------|--|
| Manual | Installation Guide (DE/EN/FR/ES/IT/PT/NL) |
| Cable | 1 Ethernet cable, 3 m |
| Power supply unit | External power adapter (230 V), NEST 12 V/1.5 A DC/S, coaxial power connector 2.1/5.5 mm, temperature range from -5 to +45° C, LANCOM item no. 111140 (EU) (not included in bulk delivery) |

Support

| | |
|------------------|--|
| Warranty | 3 years support |
| Software updates | Regular free updates (LCOS operating system and LANtools) via Internet |

Options

| | |
|--------------------|--|
| LANcare Basic S | Service package with security updates and support entitlement* until EOL and 5 years replacement service (* support access required, e.g. support contract or LANCOM Service Packs 24/7 or 10/5), item no. 10720 |
| LANcare Advanced S | Service package with security updates and support entitlement* until EOL and 5 years NBD advance replacement (* support access required, e.g. support contract or LANCOM Service Packs 24/7 or 10/5), item no. 10730 |
| LANCOM Public Spot | Hotspot option for LANCOM products, versatile access (via voucher, e-mail, SMS), including a comfortable setup wizard, secure separation of guest access and internal network, item no. 60642 |

LANCOM Management Cloud

| | |
|-----------------------------|--|
| LANCOM LMC-A-1Y LMC License | LANCOM LMC-A-1Y License (1 Year), enables the management of one category A device for one year via the LANCOM Management Cloud, item no. 50100 |
| LANCOM LMC-A-3Y LMC License | LANCOM LMC-A-3Y License (3 Years), enables the management of one category A device for three years via the LANCOM Management Cloud, item no. 50101 |
| LANCOM LMC-A-5Y LMC License | LANCOM LMC-A-5Y License (5 Years), enables the management of one category A device for five years via the LANCOM Management Cloud, item no. 50102 |

Accessories

| | |
|-------------------------|---|
| LANCOM WLAN controllers | LANCOM WLC-30, Art.-Nr. 61789 (EU), LANCOM WLC-1000, Art.-Nr. 61783 (EU), LANCOM WLC Basic Option for Routers, Art.-Nr. 61639 |
| LANCOM Wall Mount LN | Robust mounting plate for simple, theft-proof mounting of LANCOM devices with LN housing, Item no. 61342 |

LCOS 10.50

LANCOM LN-830acn dual Wireless

Accessories

LANCOM WLAN PSU (EU, white, Bulk 10) 10x white LANCOM WLAN PSU 230V to 12V/2A DC power adapter, item no. 61814

LANCOM Serial Adapter Kit For the connection of V.24 modems with AT command set and serial interface for the connection to the LANCOM COM interface, incl. serial cable and connection plug, item no. 61500

LANCOM PoE++ Injector (EU) 1-port PoE injector with multi-Gigabit support, integrated power supply, compatible with the standard IEEE 802.3af/at/bt (up to 65W), item no. 61779 (EU)


Item number(s)

LANCOM LN-830acn dual Wireless 61745 (EU), 61746 (UK) (EU/UK)


LANCOM LN-830acn dual Wireless 61754 (Bulk 10)

Antenna Gain

antenna pattern, 2.4 GHz

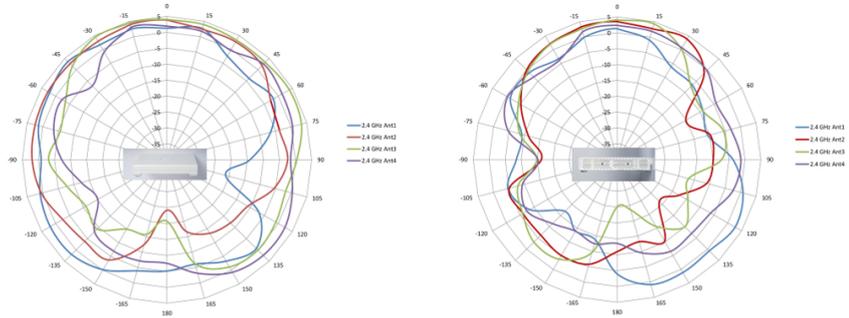

antenna pattern, 5.2 GHz

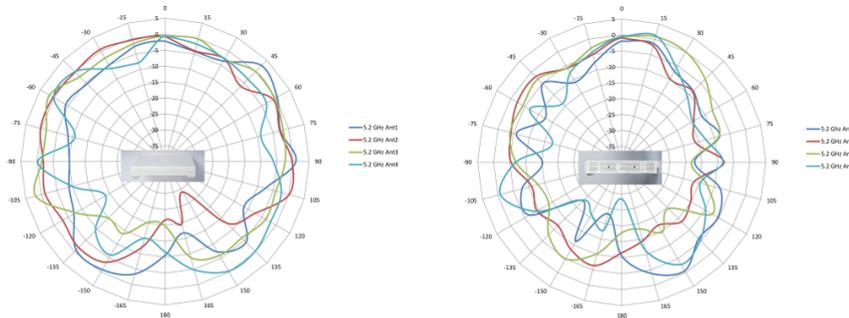

LCOS 10.50

LANCOM LN-830acn dual Wireless

Antenna Gain

antenna pattern, 5.6 GHz

